

SureHeat® JET Air Heater


12

Specifications

- Air temp controllable to 1400°F (760°C) ±1°
- Power 3.0kW - 8.0kW 240V~ 1φ
- Two internal "K" TC sensors for control and safety:
 - o S1 measures inlet temp.
 - o S2 measures exit temp.
- Rapid heat-up and cool-down.
- Maximum air pressure 60 PSI (4 Bar)
- CE, UL compliant
- 'Ceramic-only' design for food packaging applications.
- Max inlet temp 200°F (93°C)
- Use SureHeat JET CONTROL (purchased separately) for easy installation.





Performance

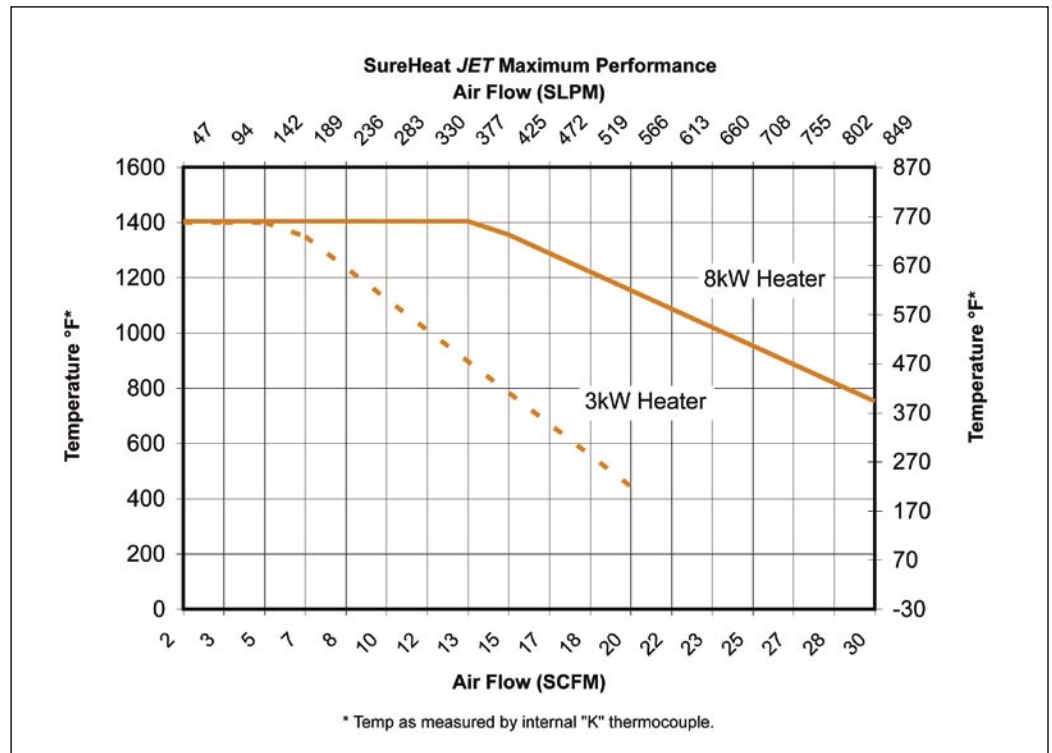

Installation

Wiring Notes:

- S1 and S2 sensors are "K" type thermocouples.
- S1 measures inlet air temperature.
- S2 measures exit air temperature.
- See Operating Manual for control settings.

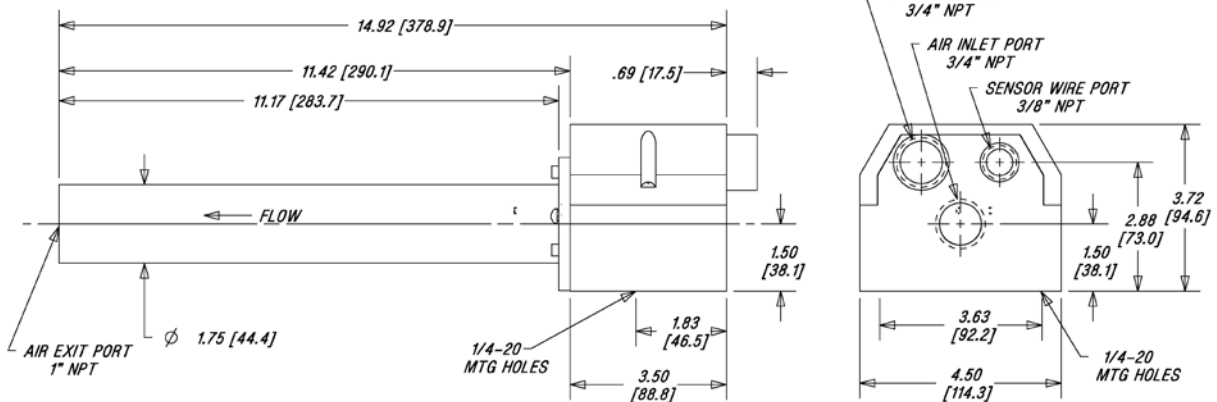

Products

Part Number	Description	Max Watts	Max Volts	Max Amps
074718	SureHeat JET 3.0kW Heater	3.0kW	240V~ 1ϕ 50/60 Hz	12.5
074719	SureHeat JET 8.0kW Heater	8.0kW	240V~ 1ϕ 50/60 Hz	33.3

Accessories

Part Number	Description	Max Watts	Max Volts	Max Amps
074722	SureHeat JET CONTROL	8.0kW	240V~ 1ϕ 50/60 Hz	35